


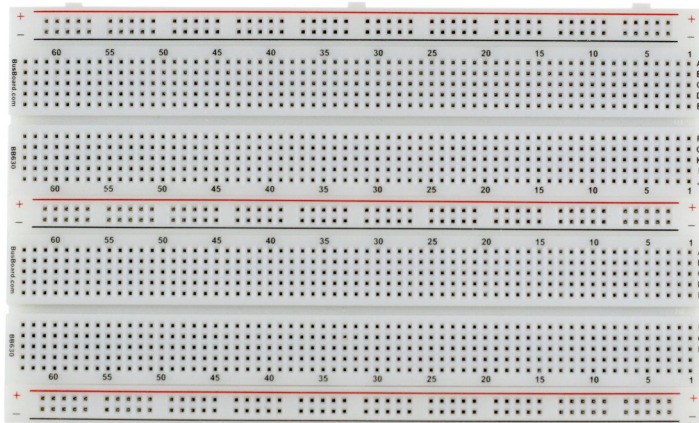


BB1560MTM

**Solderless Plug-in BreadBoard
with 1560 tie-points and six power
rails.**

BB1560MTM Features:

- Modular design for easy separation of parts.
- 1560 total tie-points: 1260 tie-point circuit area and six 50 tie-point distribution strips.
- White ABS plastic body with black printed legend and color legend on distribution strips.
- Phosphor bronze contacts with plated nickel finish rated for 50,000 insertions.
- 21 to 26 AWG insertion wire size (0.016 - 0.028" / 0.4 - 0.7mm diameter).
- Rated at 36 Volts, 2 Amps.
- Peelable adhesive tape backing provided for attaching to a surface.

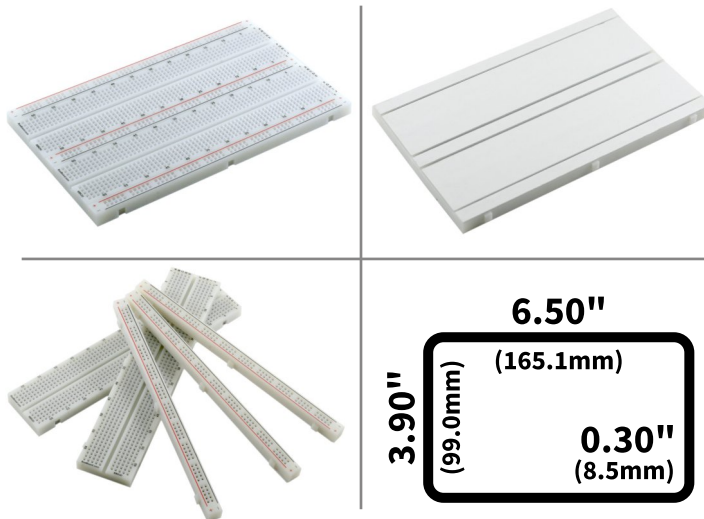

BB1560MTM Description:

BB1560M is a modular solderless (plug-in) breadboard with 1560 connection tie-points (i.e. 1560 wire insertion holes). It has 6 power rails. Solderless breadboards are great for building and testing new circuits because parts can be easily inserted and removed. They are completely re-usable. The BB15M60 has two 630 tie-point IC-circuit areas plus six 50 tie-point power rails.

The housing is made of white ABS plastic, with a printed legend giving numbers and letters for columns and rows. The internal contacts are phosphor bronze with a plated nickel finish. A peelable adhesive tape backing is provided for attaching it to a surface.


The five parts of the BB1560M can be detached and re-arranged to make different configurations. The three BB100R power rails and the two BB630 circuit areas each have their own separate adhesive backing. i.e. The power rails are not connected to the circuit area by the adhesive tape backing (as is the case for the BB830 and BB1660). Mix and match the parts as needed.

BB1560M™ Specifications:

- Part #: BB1560M
- Body Material: ABS Plastic (White)
- Hole Style: Square Wire Holes
- Hole Pitch: 0.1" / 2.54mm
- Clip Contact: Phosphor Bronze, Plated Nickel Finish
- Contact Life: up to 50,000 insertions
- Rating: 36 Volts, 2 Amps
- Insertion Wire Size: 21 - 26 AWG
0.025" square post headers
0.016 - 0.028" / 0.4 - 0.7mm
- Length: 6.50" / 165.1mm
- Width: 3.90" / 99.0mm
- Thickness: 0.03" / 0.8mm



BB1560M™ Measurements:

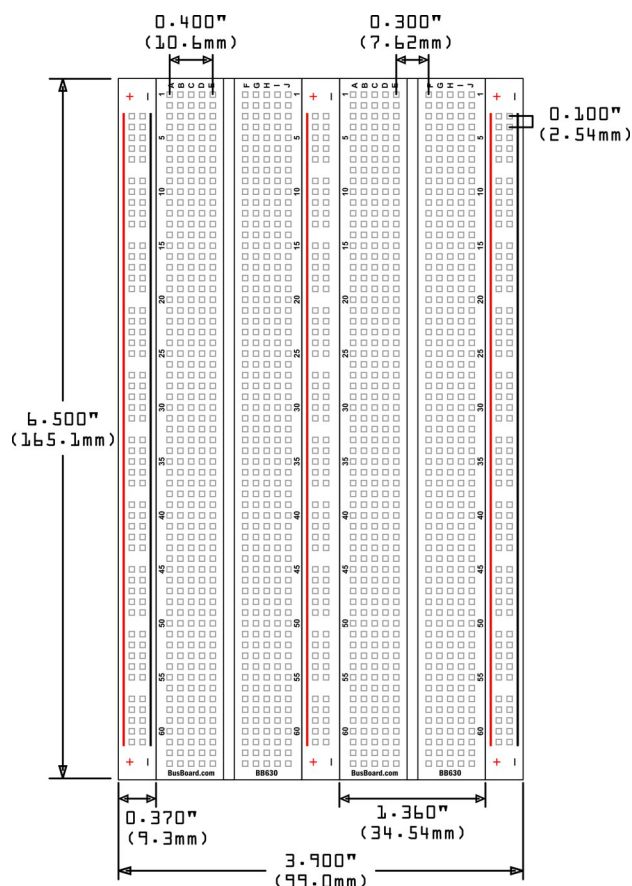

BB1560M™ Drawings:

